

CHART PLOTTER

NES-3010G

NSR's new generation of Chart Plotter:

- Chart + AIS Display + GNSS Navigator, 3 in 1
- Meet the IMO regulation and IEC standards
- Touch screen operation
- Android system
- Easy to upgrade



- NES-3010G is designed for vessel navigational aid, which can work together with AIS, to provide GNSS navigator aid and AIS presentation, and also can work alone as a GNSS navigator.
- NES-3010G conforms to the international standards, such as IMO MSC.112 (73), IEC 60945, IEC 61108-1, IEC 61162-1 etc.



SPECIFICATIONS

- OS: Android
- LCD DISPLAY: Touch screen operation
- Size: 10.1 inch
- Resolution: 1280×800
- Interface: RS232×1, USB×1 (NES-3010)
RS422×2, USB×1, ANT×1 (NES-3010G)
- Power Supply: DC 24 V (range 9 V ~ 36 V)
- IP Grade: IP22 (Plotter)
IP66 (Antenna)

EQUIPMENT LIST

● STANDARD (INDEPENDENT PLOTTER)

- | | | |
|----------------|-----------|-------|
| - Plotter | NES-3010G | 1 pc |
| - GNSS Antenna | NGA100 | 1 pc |
| - Accessories | | 1 set |

● STANDARD (PLOTTER USED WITH AIS)


- | | | |
|---------------|----------|-------|
| - Plotter | NES-3010 | 1 pc |
| - Accessories | | 1 set |

● OPTIONS


- | | | |
|-----------------------|--|------|
| - Flush Mount Bracket | | 1 pc |
|-----------------------|--|------|

SYSTEM DIAGRAM

Plotter used with AIS:

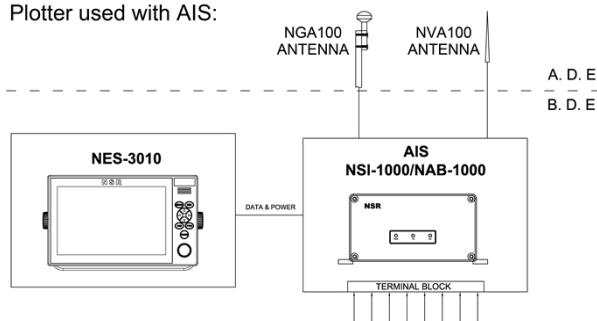

Independent Plotter: GNSS ANTENNA

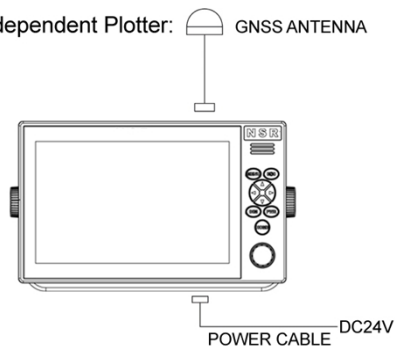

SIZE DIMENSION

