ECS (Electronic Chart System)

- Comply with the latest IEC standards
- AVCS ENC Supported
- Built-in wide-range isolated power supply
- Completely isolated interface to avoid interaction
- 1280 x 1024 high-resolution color LCD, touch screen operation
- Brightness control on panel, convenient for night navigation
- Industrial design for marine use
- Android O/S for easy operation
- Type approved by CCS



- NES-1000 ECS is an electronic chart system, which is designed to comply with the latest IEC and IHO S52 standards.
- Electronic chart display, illimitable zoom.
- Position, COG, SOG and heading are displayed.
- CPA/TCPA calculation, Navigation functions with route plan.
- AIS targets are displayed on the chart
- The inputs include GNSS, AIS, VDR, Echo Sounder and HDG data.









SPECIFICATIONS

MAIN UNIT

Resolution: 1280×1024Display Color: 16.7M, 6bits+FRC

Display Size: 19 inchProtected Glass: Bonding Glass

Power Supply: DC 24V (range 10V~36V)
 Size: 451 (W) × 418.3 (H) × 97.7 (D) mm

- Weight: 14 kg

- Interface: RS232×2, RS422×4

RS422 (standby) ×4

USB×2, LAN×2, DI/DO×2, HDMI×1

MONITORING

Own Ship: Position, COG, SOG, Heading
 AIS Targets: AIS Class A, AIS Class B,

AIS AtoN Station, AIS MOB

AIS Base Station

AIS Alert: CPA/TCPA

S/W

- OS: Android

- Operation Method: Touch screen operation, Mouse, Keyboard

- Chart Update: USB
IP GRADE: IP22

EQUIPMENT LIST


STANDARD

- Main Unit (19 inch) NES-1000 1 pc - Mouse NES-1000T 1 pc - Keyboard NES-1000K 1 pc - Installation Material 1 set

OPTIONS

- AC/DC PSU PS-10 1 pc



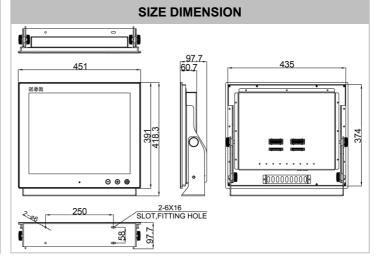

SYSTEM DIAGRAM EXT.GNSS COMPASS GNSS NAVIGATOR RS-422-1 NES-1000 (19') RS-422-2 ⊝ ⊕ € RS-422-4 ECHO SOUNDER 1.5m 1.5m DC24V AC220V P.S.U DC24V MOUSE KEYBOARD

